M700DM9

7-inch ARM A73 + A53 Rugged Android Tablet



KEY FEATURES

- 7 inch android tablet, 1280 x 720 TFT Panel with direct optical bonding
- IP65 waterproof and dustproof
- 4 GB RAM + 64 GB eMMC
- Rated for extreme temperature use
- Supports Android 11.0 OS, Sunlight readable android tablet



SPECIFICATIONS


Display				
Resolution	1280x720	Size	7.0 inches	
Contrast Ratio	800:1	Panel Brightness	650 nits	
View Angles	80,80,80,80	Туре	Projected Capacitive Multi Touch	
Touch Mode	Support Hand / Gloves and Rain Mode	Bonding	Optical Bonding for Sunlight Viewability	
System Specification				
Processor	ARM A73 x 4 (2.0 GHz) + A53 x 4 (2.0 GHz)	Memory	4GB	
Storage	64GB	Operating System	Android 11.0	
WLAN	Support	BT	Support	
WWAN	4G/LTE (Optional)	GNSS	GPS/GLONASS	
RFID	NFC (Read / Write, Peer to Peer mode) (Optional)	Sensors	Ambient Light Sensor, E-Compass, Gyro, Acceleration Sensors	
Camera				
Front Camera	8MP Camera	Rear Camera	13MP Camera with LED Auxiliary Light (Auto Focus)	
Mechanical				
Dimension	212.4 x 132.8 x 19 mm	Weight	550g	
IO Ports				
USB Port	1 x USB Type C OTG	SD Card Slot	1 x Micro SD Card Slot	
SIM Card Slot	1 x Micro SIM Card Slot	Audio	1 x Audio Combo connector (Mic in and Line Out) 2 x Built-in Mic 1 x Speaker 1 x Earphone	
Indicator	2 x LED Indicators (Power, Battery)	Docking Connector	1 x Docking Connector	
Environment				
Operating Humidity	5% to 95% RH, Non-Condensing	Operating Temperature	-10°C to 50°C (Battery mode) -20°C to 60°C (Charging mode)	
Storage Temperature	-30°C to 70°C	Shock	MIL-STD-810H Method 516.8 Procedure I	
Vibration	MIL-STD-810H Method 514.8 Procedure I	IP rating	IP65	
Drop	MIL-STD-810H Method 516.8, 5 ft			
Certification				
Certification	CE, FCC			
Control				
Button	1 x Volume + ,1 x Volume - , 1 x Power Button, 1 x Home Button, 1 x Menu Button, 1 x Return Button, 1 x Trigger Button			
Power				
Battery	3.7V 5300mAh Warm swappable function (Optional)	Battery Operating Time	20Hr	
Power Rating	DC 5V	Adapter	Input: 100V-240V AC Output: DC 5V 3A	

Security Function					
SOTI MobiControl	SOTI MobiControl Compliance				
Accessory					
Accessory	Universal Adapter x1 Battery x1	Optional Accessory	USB Type-C Cable x1 Battery Charging Dock Vehicle Dock (Charging + Connectors) Vehicle Dock (Charging Only) Desk Dock Hand Strap Micro SD Card Capacitive Touch Stylus Vehicle Adapter HDMI Adapter		

Barcode Scanner

Barcode Scanner 1D/2D Barcode Reader (Optional)

DIMENSIONS UNIT:MM

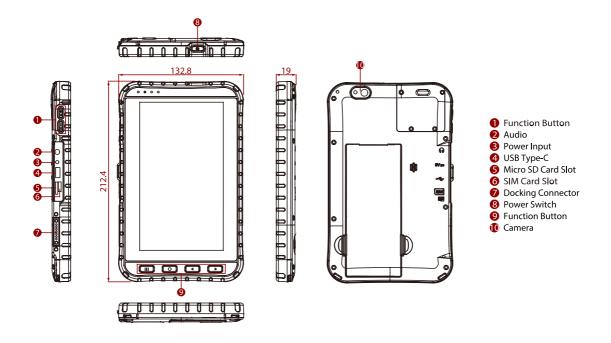

NOTE

- 1. Total usable memory will be less dependent upon actual system configuration.
- 2. SOTI is available upon request.
- 3. Length measurements do not include protrusions.

- Englit measurements do not include probasions.
 The drop test with a high-capacity battery must come with a hand strap.
 Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.
 Accessories and integrated options may vary depending on your configuration.
 This is a simplified drawing and some components are not marked in detail.
 The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.